



# Miller Diving Easy Lift Extraction Bridle

P/N 900-255

## Identification Plate



## Care Label

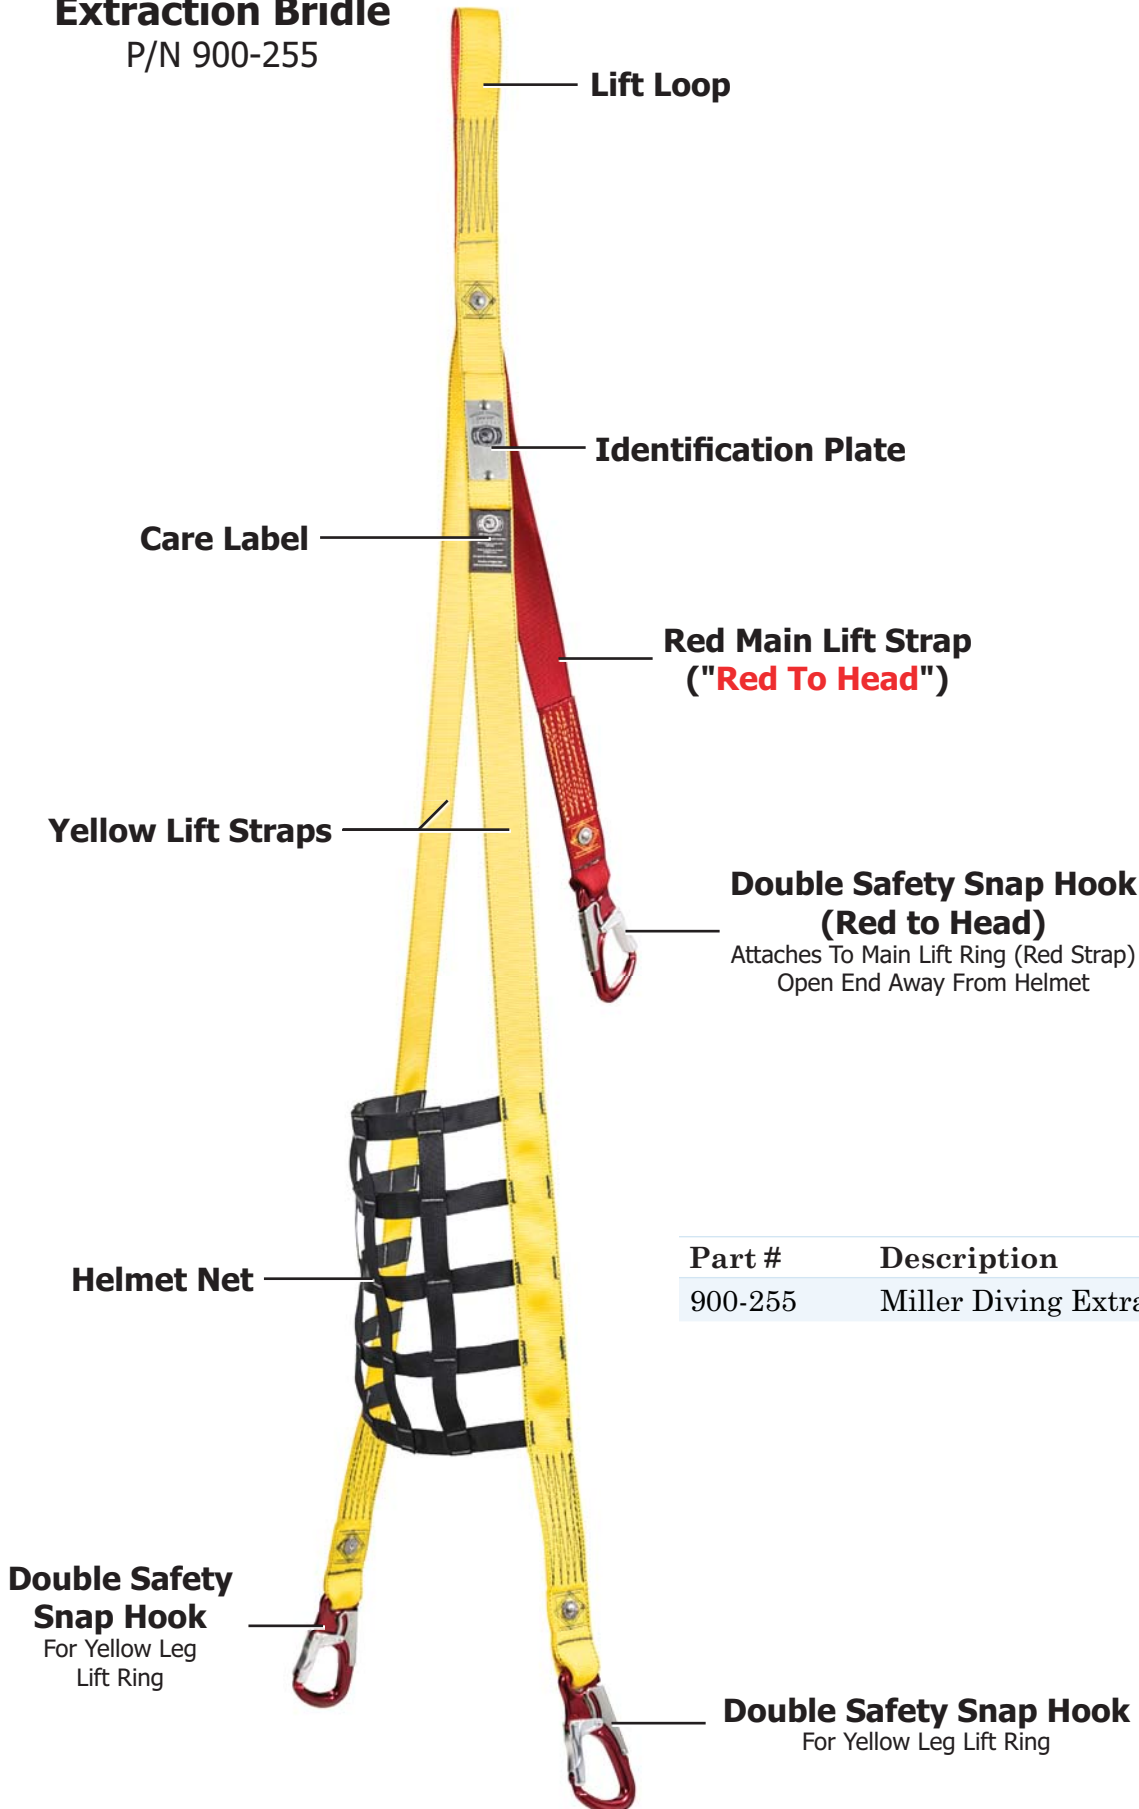

Part #	Description
900-255	Miller Diving Extraction Bridle

## 1.2 Miller Diving Easy Lift Harness & Extraction Bridle Specifications And Testing Compliances

### 1.2.1 ANSI Compliance

The Miller Diving Easy Lift Harness and Extraction Bridle have been tested and meet all criteria for ANSI Z359.1 standards.

### 1.2.2 ADCI Standards

The Miller Diving Easy Lift Harness and Extraction Bridle meet the ADCI Consensus Standards 6.1 Edition.

### 1.2.3 CE Approval—(PENDING)

The Miller Easy Lift Harness and Extraction Bridle are being tested to see that they conform to the performance requirements in accordance to Directive 89/686/EEC, Article 10 and 11. The CE mark on the harness will be located on the stainless steel plate permanently affixed to the rubber back pack. The CE mark on the extraction bridle will be located on the stainless steel identification plate permanently affixed just below the large pick up loop.

Notified Body: will be EUROFINS-MODULO UNO S.p.A., Via Cuorgne', nr. 21, 10156, Torino, Italy. Identification Number 2049.

### 1.2.4 Weight Limits

Compliant with the worlds standards listed above the Miller Diving Easy Lift Harness and Bridle meet and exceed the standard support weight limits.

Main Lift D-Ring (Red):  
917 Kg / 9,00 N (2,023 Pounds)

Leg Lifting D-Rings (Yellow), Adjustment Buckles and Umbilical Attachment D-Rings:  
356 Kg / 3,500 N (787 Pounds)

Utility and Tool Attachment D-Ring:  
68 Kg / 667 N (150 Pounds)

Chest Strap Adjustment Rings:  
222 Kg / 23 N (50 Pounds)

## 1.3 Material Specifications For Miller Diving Easy Lift Harness

Primary Webbing : 1.75 inch polyester, red, yellow, blue.

Webbing, Rear Pick-up Lift Ring attachment/Red center strap, Leg Straps: 1.75 inch Polyester,

Webbing, Leg Straps: also with Black 1 inch Nylon.

All Lift Rings, Umbilical Attachment D-Rings, all adjustment buckles, adjusters and leg loop fixed catches: Forged Stainless Steel.

Utility D-rings: Stainless Steel

Chest Strap Adjustment, 1 inch Rings: Stainless Steel.

Rubber Back Pack: Conveyer Belt Material.

Strap Keepers: 3 mm, Nylon two side Neoprene.

Rivets & Washers: Stainless Steel.

Cord: Polyester.

Threads: Nylon (Leg straps). Bonded Polyester (Shoulder straps & waist).

Identification Plate: Stainless Steel

## 1.4 Material Specifications For Miller Diving Extraction Bridle

Webbing, Yellow and Red 1.75 inch Polyester

Webbing : 1 inch Nylon, Black.

Double Safety Snap Hook, Gated:  
Material: Aluminum.

Meets and exceeds testing to 2,023 pounds (917.6 Kg), i.e. conforms to the 89/686 EEC Directive.

Rivets & Washers: Stainless Steel.

Thread: Bonded Polyester.

Cord: Polyester.

Identification Plate: Stainless Steel.